




# NUTS

## SERRATED FLANGE LOCK NUTS

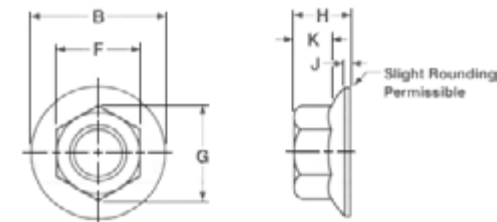

Nominal Size or Basic Major Diameter of Thread		F		G		B		H		K	J
		Width Across Flats		Width Across Corners		Flange Diameter		Nut Thickness		Wrenching Length	Flange Thickness
		Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Max.
6	0,138	0,312	0,302	0,361	0,342	0,422	0,406	0,171	0,156	0,10	0,02
8	0,164	0,344	0,334	0,397	0,381	0,469	0,452	0,203	0,187	0,13	0,02
10	0,190	0,375	0,365	0,433	0,416	0,500	0,480	0,219	0,203	0,13	0,03
12	0,216	0,438	0,428	0,505	0,488	0,594	0,574	0,236	0,222	0,14	0,04
1/4	0,250	0,438	0,428	0,505	0,488	0,594	0,574	0,236	0,222	0,14	0,04
5/16	0,313	0,500	0,489	0,577	0,557	0,680	0,660	0,283	0,268	0,17	0,04
3/8	0,375	0,562	0,551	0,650	0,628	0,750	0,728	0,347	0,330	0,23	0,04
7/16	0,438	0,688	0,675	0,794	0,768	0,937	0,910	0,395	0,375	0,26	0,04
1/2	0,500	0,750	0,736	0,866	0,840	1,031	1,000	0,458	0,437	0,31	0,05
5/8	0,625	0,938	0,922	1,083	1,051	1,281	1,248	0,569	0,545	0,40	0,05
3/4	0,750	1,125	1,088	1,299	1,240	1,500	1,460	0,675	0,627	0,46	0,06