




NUTS

T- NUTS, STRAIGHT BARREL

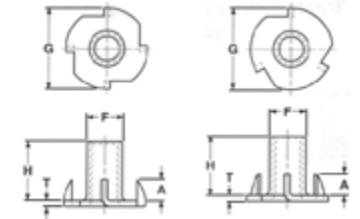

Thread Size	G	H	F	A	T	Drill Size	LBS Per M Pcs.
	Flange Dia.	Barrel Height	Barrel Diam.	Prong Height	Material Thickness		
10 - 24	3/4	5/16	0,243	7/32	0,040	1/4	7
10 - 24	3/4	5/16	0,243	7/32	0,040	1/4	7
10-32	3/4	5/16	0,243	7/32	0,040	1/4	7
10-32	3/4	5/16	0,243	7/32	0,040	1/4	7
1/4 - 20	3/4	5/16	0,305	7/32	0,047	5/16	9
1/4 - 20	3/4	5/16	0,305	7/32	0,047	5/16	9
1/4 - 20	3/4	7/16	0,305	5/16	0,047	5/16	9
1/4 - 20	3/4	7/16	0,305	1/4	0,047	5/16	9
5/16 - 18	7/8	3/8	0,390	1/4	0,063	25/64	14
5/16 - 18	7/8	3/8	0,390	1/4	0,063	25/64	14
5/16 - 18	7/8	5/8	0,390	5/16	0,063	25/64	18
3/8 - 16	1	7/16	0,440	11/32	0,063	29/64	19